



Subject to change without prior notice

Modello Model		TSC.150	TSC.150-1	TSC.150-1
Codice Code		9402052	9402053	9402054
Potenza motore Motor Power	kW (50Hz) kW (60Hz)	0,75 0,90	1,3 1,5	1,3 1,5
Alimentazione Power supply	V±5%Δ/Y(50Hz) V±5%Δ/Y(60Hz)	220-255 / 380-440 220-277 / 380-480		380-440 / 660-760 380-480 / 660-830
Assorbimento Adsorbition	A Δ/Y (50Hz) A Δ/Y (60Hz)	3,3 / 1,9 3,6 / 2,1	4,6 / 2,7 5,2 / 3,0	2,7 / 1,56 3 / 1,73
Portata Flow rate	m³/h (50Hz) m³/h (60Hz)	150 175	150 175	150 175
Vuoto Vacuum	mbar (50Hz) mbar (60Hz)	-150 -140	-175 -205	-175 -205
Sovrappressione Pressure	mbar (50Hz) mbar (60Hz)	+140 +140	+200 +220	+200 +220
Rumorosità (UNI EN ISO 2151) (K 3dB) Noise level (UNI EN ISO 2151) (K 3dB)	dB(A) (50Hz) dB(A) (60Hz)	63 64	64 65	64 65
Peso Weight	kg [N]	17,4 [170,7]	19 [186,4]	19 [186,4]


Vacuum @ 50Hz – 400V

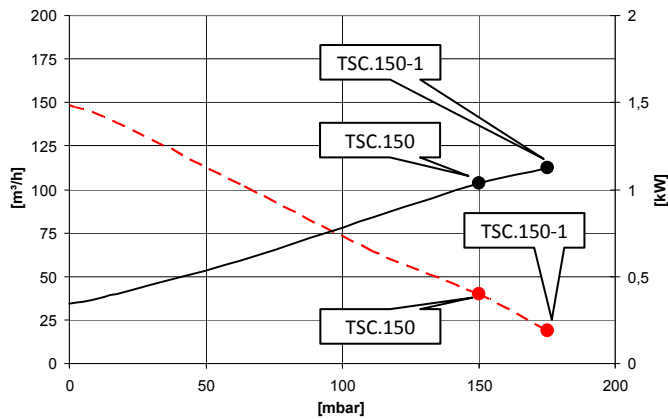


Pressure @ 50Hz – 400V

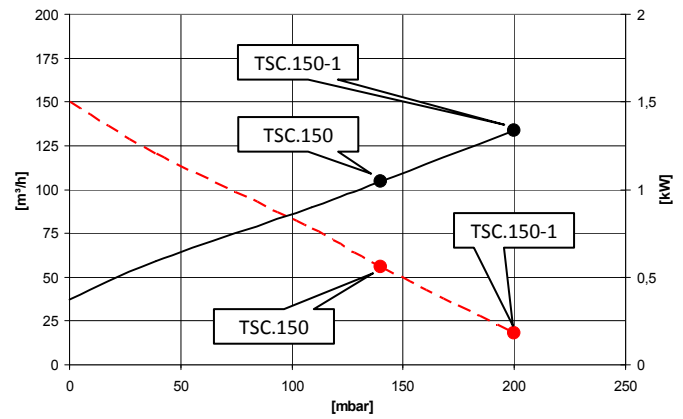

Vacuum @ 60Hz – 460V

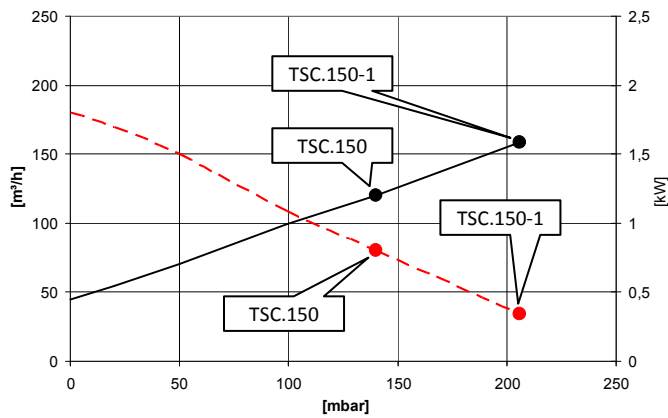

Pressure @ 60Hz – 460V

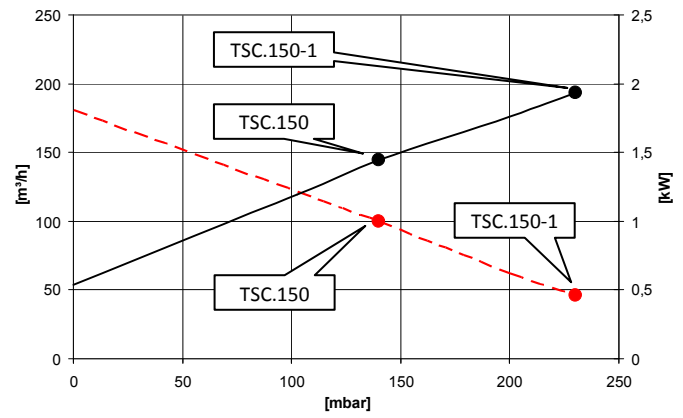


----- Portata / Flow rate

————— Pot. Assorbita / Absorbed Power


Curve riferite alla pressione di 1013mbar (Ass.) e temperatura 20°C (tolleranza ±10%)
Curves referes to 1013mbar (Abs.) pression and 20°C temperature (tolerance ±10%)

Subject to change without prior notice

50Hz – 400V

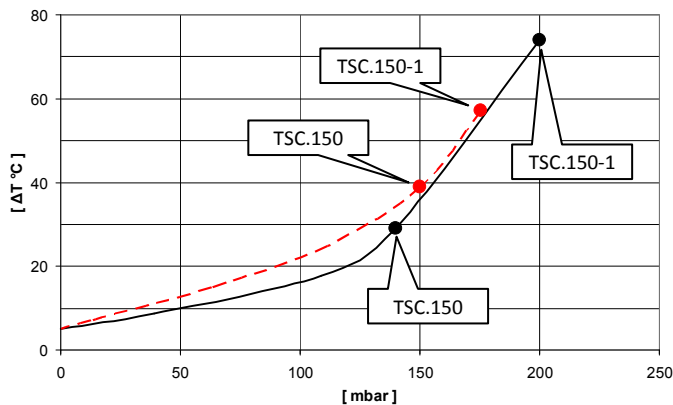

60Hz – 460V

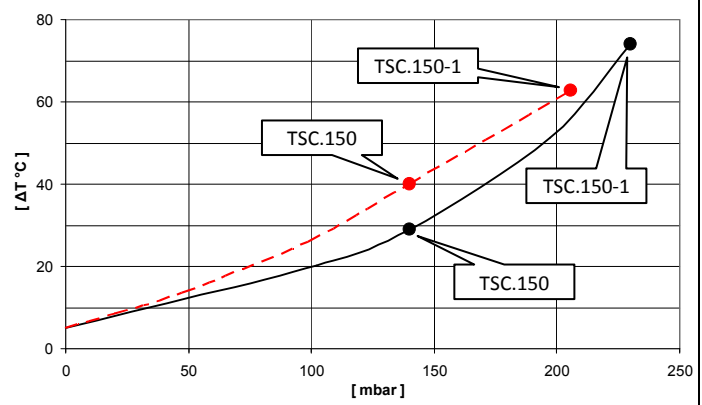

----- Aspirazione / Suction

————— Mandata / Compression

Temperatura ambiente 20°C (tolleranza sulla temperatura ΔT ±5°C)
Room temperature 20°C (tolerance on temperature ΔT ±5°C)