



Modello Model		TDC.150	TDC.150-1
Codice Code		9403031	9403032
Potenza motore Motor Power	kW (50Hz) kW (60Hz)	1,5 1,8	2,2 2,7
Alimentazione Power supply	V±5% Δ/Y (50Hz) V±5% Δ/Y (60Hz)	220-255 / 380-440 255-277 / 440-480	
Assorbimento Adsorbition	A Δ/Y (50Hz) A Δ/Y (60Hz)	6,7 / 3,9 7 / 4	7,8 / 4,5 9,5 / 5,5
Portata Flow rate	m³/h (50Hz) m³/h (60Hz)	150 175	150 175
Vuoto Vacuum	mbar (50Hz) mbar (60Hz)	-275 -300	-280 -350
Sovrappressione Pressure	mbar (50Hz) mbar (60Hz)	+320 +300	+375 +435
Rumorosità (UNI EN ISO 2151) (K 3dB) Noise level (UNI EN ISO 2151) (K 3dB)	dB(A) (50Hz) dB(A) (60Hz)	66 69	66 69
Peso Weight	kg [N]	29,9 [293,3]	32,5 [318,8]

Subject to change without prior notice


Vacuum 50Hz @ 400V

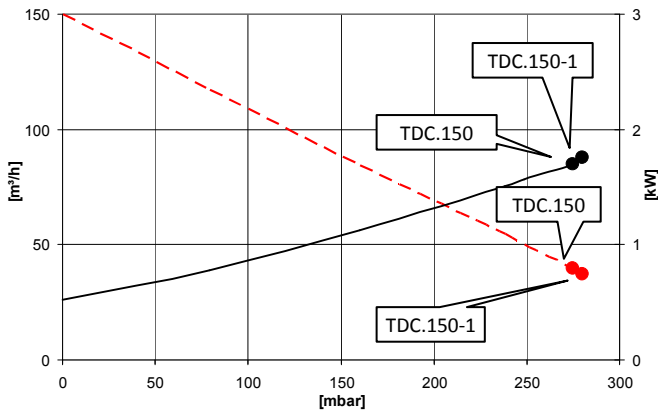


Pressure 50Hz @ 400V

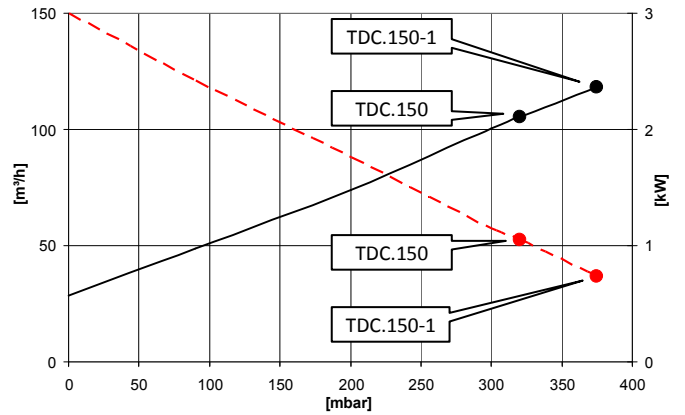

Vacuum @ 60Hz - 460V

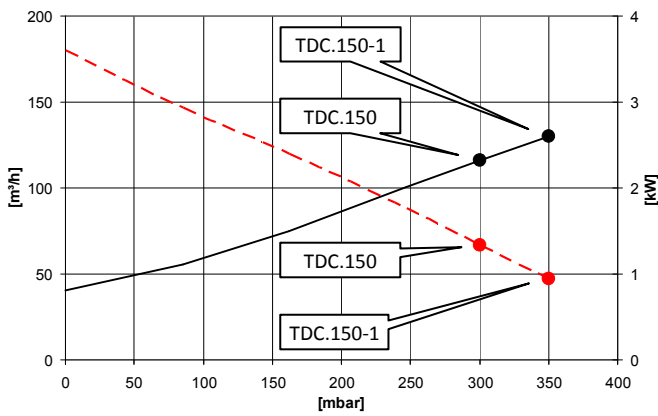

Pressure @ 60Hz - 460V

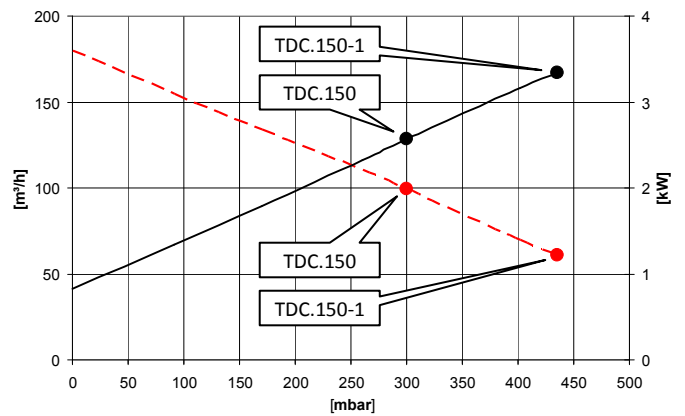


----- Portata / Flow rate


————— Pot. Assorbita / Absorbed Power

Curve riferite alla pressione di 1013mbar (Ass.) e temperatura 20°C (tolleranza ±10%)
 Curves referes to 1013mbar (Abs.) pression and 20°C temperature (tolerance ±10%)

50Hz - 400V

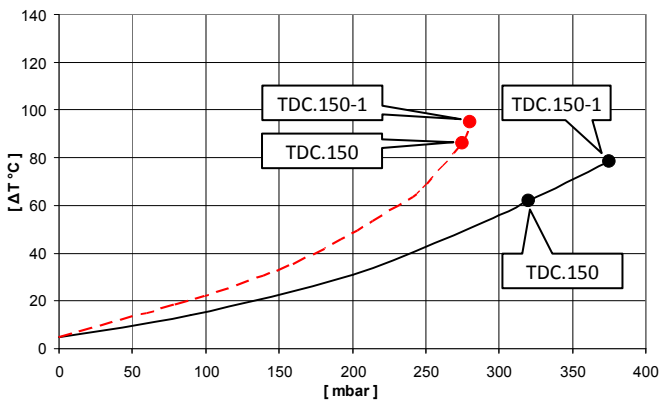

60Hz - 460V

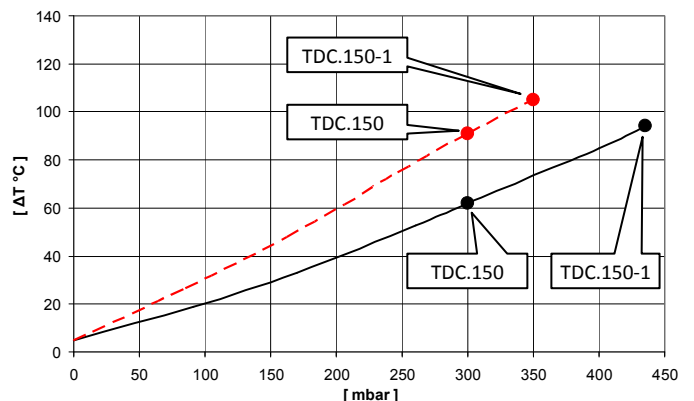

----- Aspirazione / Suction

————— Mandata / Compression

Temperatura ambiente 20°C (tolleranza sulla temperatura ΔT ±5°C)
 Room temperature 20°C (tolerance on temperature ΔT ±5°C)

Subject to change without prior notice